

LUMINARY 48

Product Specifications

Product:	Luminary 48
Date:	January 2007
Description:	Fine Gauge, High Density Level Loop Heather
Pile Fibre:	100% Pure New Selected Carpet Wools
Fibre Quality:	Semi Worsted, multi-ply, twisted and non set
*Pile Fibre:	92% Wool, 8% BCF Nylon
*Fibre Quality:	Semi Worsted plus Solution Dyed Nylon Accent
Gauge:	3.175 mm (1/8")
Stitch Rate:	54.7 per 100mm
Pile Mass:	1627 gm/m ² (48 oz/yd ²)
Pile Height:	4.8mm
Colouration:	Stock Dyed
Primary Backing:	114 g/m ² (3.3 oz/yd ²) Woven Polypropylene
Secondary Backing:	237 g/m ² (7 oz/yd ²) Woven Jute
Laminate:	956 g/m ² (28.2 oz/yd ²) Synthetic Latex
Total Weight:	10.7 kg/LM (86.6oz/yd ²)
Width:	3.66 metres
A.C.C.S. Reg. No.:	93037
A.C.C.S. Grade:	Residential Extra Heavy Duty (Stairs) - 6 Star Contract Extra Heavy Duty (Stairs) - 4 Star
Critical Radiant Flux: (Burning Behaviour)	CHF Mean Result 8.5 kw/m ² (Conventionally) Smoke Value 75 % min (Conventionally)
AS/ISO 9239-1:2003 Part 1 - Test	Passes requirements of BCA spec C1.10a Class 9a; 9b; 9c Buildings (Conventional)
Product Features:	<ul style="list-style-type: none"> • Increased thermal and acoustic comfort. • Superior appearance retention when correctly maintained. • Available in 6 standard colours. • The use of chair pads is mandatory when used in commercial application. • Must be laid in accordance with AS 2455.1995. • Subject to Tuftmaster's 'Terms of Trading.'

LUMINARY 40

Product Specifications

Product:	Luminary 40
Date:	January 2007
Description:	Fine Gauge, High Density Level Loop Heather
Pile Fibre:	100% Pure New Selected Carpet Wools
Fibre Quality:	Semi Worsted, multi-ply, twisted and non set
*Pile Fibre:	92% Wool, 8% BCF Nylon
*Fibre Quality:	Semi Worsted plus Solution Dyed Nylon Accent
Gauge:	3.175 mm (1/8")
Stitch Rate:	39.5 per 100mm
Pile Mass:	1356 gm/m ² (40 oz/yd ²)
Pile Height:	4.4mm
Colouration:	Stock Dyed
Primary Backing:	114 g/m ² (3.3 oz/yd ²) Woven Polypropylene
Secondary Backing:	237 g/m ² (7 oz/yd ²) Woven Jute
Laminate:	956 g/m ² (28.2 oz/yd ²) Synthetic Latex
Total Weight:	9.7 kg/LM (86.6oz/yd ²)
Width:	3.66 metres
A.C.C.S. Reg. No.:	93038
A.C.C.S. Grade:	Residential Extra Heavy Duty (Stairs) - 6 Star Contract Extra Heavy Duty (Stairs) - 3 Star
Critical Radiant Flux: (Burning Behaviour)	CHF Mean Result 7.8 kw/m ² (Conventionally) Smoke Value 132 % min (Conventionally)
AS/ISO 9239-1:2003 Part 1 - Test	Passes requirements of BCA spec C1.10a Class 9a; 9b; 9c Buildings (Conventional)
Product Features:	<ul style="list-style-type: none"> • Increased thermal and acoustic comfort. • Superior appearance retention when correctly maintained. • Available in 6 standard colours. • The use of chair pads is mandatory when used in commercial application. • Must be laid in accordance with AS 2455.1995. • Subject to Tuftmaster's 'Terms of Trading.'

Installation: All carpet installations are to be in accordance with AS2455.1:1995 unless otherwise stated in writing by Tuftmaster Carpets.

Carpet is a textile that is subjected to extreme variations in temperature and tension in the manufacturing process.

During this process variances may occur in both the width and length of this patterned carpet and as a result an exact pattern match cannot be guaranteed.

A reasonable pattern match may be obtained when installing carpet conventionally over an underlay and when installed by trained, experienced and professional carpet layers.

Pattern matching cannot be guaranteed when installed by the direct stick or dual bond method as this only allows for minor stretching and adjustments of the pattern during installation.


When installing patterned carpets on open floors it is a requirement that the carpet layers have unrestricted access to the entire floor being laid. The initial run of carpet on any type of installation is the most critical and ensures that the project is set out accurately prior to joining, to ensure the best possible pattern match over the entire floor area is achieved. No acceptable pattern match can be guaranteed if the carpet layers are only provided part floors at a time.

Carpet Joins: Tuftmaster Carpets specify that when laying conventionally or dual bond that all cut edges to be joined must be tipped with an edge sealing latex adhesive (minimum 60% component) and be given sufficient time to cure properly prior to heat taping (time is dependant on site conditions and temperature). It is the installers responsibility to ensure that the correct heat tapes are used when installing carpet by both methods.

Dye variation: Shade or pattern variations may occur from sample and between dye lots and within production runs due to the many variances in the manufacturing of carpet, however these variations will be within recognized textile industry standards.

Cleaning: Carpet should be cleaned and maintained in accordance with AS 3733:1995.1.

Panelling: Panelling may be seen in some loop pile carpets. The effects of the stippled yarn can appear as panelling down the length of the carpet. This is not a manufacturing defect and will not effect the performance of the carpet.

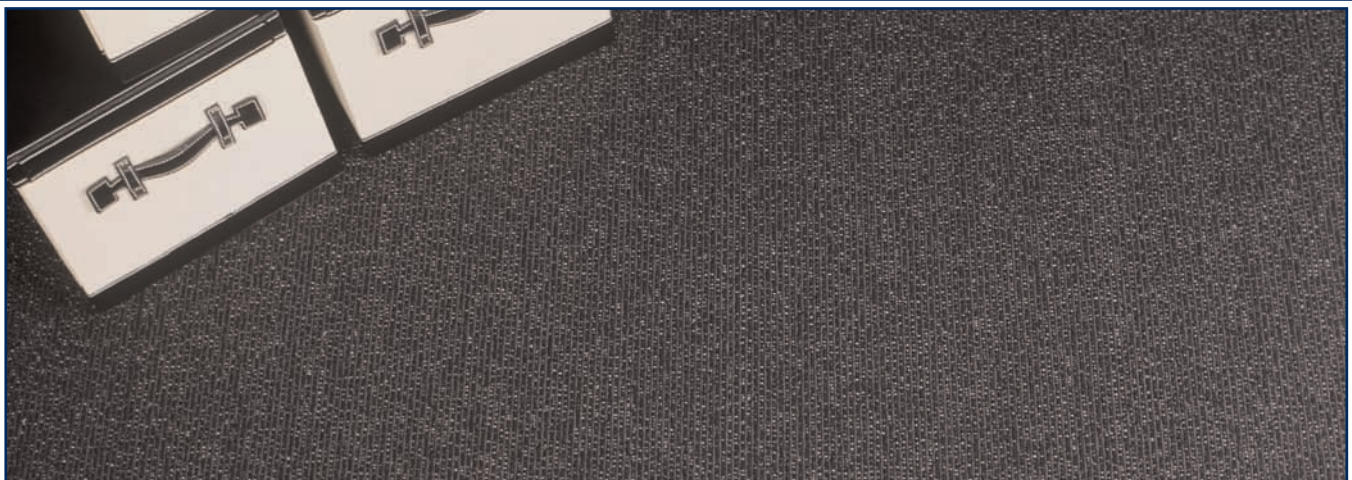

HEAD OFFICE TUFTMASTER CARPETS PTY. LTD.

A.C.N. 004 802 564

Cope Street, Preston, Victoria 3072.

Telephone: 61 3 9791 1388

Facsimile: 61 3 8480 4080

Email: email@tuftmaster.com.au

Interstate Offices

N.S.W.
(02) 9555 2177

Queensland
0402 119 538
1800 062 076

S.A.
0402 119 541

W.A.
0402 119 545

Tasmanian Agent
(03) 6234 9855

